

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Interchangeable Tool Compatibility

Cementex innovates. The innovation of our X-DRIVE® technology as well as our desire to make tools backward compatible, or for those that prefer or need our Short Drive design, has created a large variety of sockets, extensions and adapters. We've designed a compatibility chart to assist in the proper selection of tools based on the ratchet or torque wrench drive that is being connected to a style of socket. This outlines the proper insulation style configurations for proper compatibility, compliance and most importantly, safe coverage. The base tool construction options that are available are identified as well. As always, if you don't see what you are looking for, please contact your Cementex Dealer or Sales Representative for a solution.



EXTENSION / ADAPTER / SOCKET COMPATIBILITY

DRIVE SOCKET INSULATION STYLES

BOOTED:
For connection to X-DRIVE® Ratchet

FLUSH:
For connection to SHORT DRIVE Ratchet



X-DRIVE®



SHORT DRIVE

BAR / ADAPTER DRIVE HEAD INSULATION STYLES

TAPERED:
Mimicks the shape of X-DRIVE® Ratchet

FLARED:
Mimicks the shape of SHORT DRIVE Ratchet



Flush Connect sockets denoted as WO in part number

Base Tool Construction


Shank/Shaft Material

The base material of any socket, adapter or extension bar. Each material has its own benefits, depending on the task being performed.



Drive Head Construction Options

The industry standard, Fixed drive head is also the Cementex standard. Unless otherwise noted or identified, drive heads will be fixed.



Both Wobble and Wobble / Fixed drive heads are available in a wide variety of insulation styles and shank / shaft materials. If you would like this feature included in an item, but don't see the part number, contact a Cementex Dealer or Sales Representative about making this happen.



True to our word, there are many varieties of extension bars. If you don't see the combination you require (size, style or base material), please contact your Cementex Dealer or Sales Representative for a solution.

1/4" Square Drive Extension Bars



Length	Flush Drive Socket / Flared Drive Head	Flared Drive Head / Flush Drive Socket WOBBLE/FIXED
	2"	IB14-2
3"	IB14-3	IB14-3WF
6"	IB14-6	IB14-6WF
10"	IB14-10	-

FX38-12

**NOTE: Max torque values indicated individually on each fiberglass extension bar.

3/8" Square Drive Extension Bars



Length	Booted Drive Socket / Tapered Drive Head	Booted Drive Socket / Flared Drive Head	Flush Drive Socket / Tapered Drive Head	Flush Drive Socket / Flared Drive Head
	1.5"	IB38-1.5	IB38-1.5F	IB38-1.5 WO
3"	IB38-3*	IB38-3F*	IB38-3 WO*	IB38-3F WO*
6"	IB38-6*	IB38-6F*	IB38-6 WO*	IB38-6F WO*
10"	IB38-10	IB38-10F	IB38-10 WO	IB38-10F WO
12"	IB38-12	IB38-12F	IB38-12 WO	IB38-12F WO
20"	IB38-20	-	-	-

Length	FIBERGLASS		FIBERGLASS	
	Booted / Tapered	Booted / Flared	Flush / Tapered	Flush / Flared
4"	FX38-4	FX38-4F	FX38-4 WO	FX38-4F WO
6"	FX38-6	FX38-6F	FX38-6 WO	FX38-6F WO
8"	FX38-8	FX38-8F	FX38-8 WO	FX38-8F WO
12"	FX38-12	FX38-12F	FX38-12 WO	FX38-12F WO

1/2" Square Drive Extension Bars


Length	FIBERGLASS		FIBERGLASS	
	Booted / Tapered	Booted / Flared	Flush / Tapered	Flush / Flared
3"	IB12-3	IB12-3F	IB12-3 WO	IB12-3F WO
5"	IB12-5	IB12-5F	IB12-5 WO	IB12-5F WO
10"	IB12-10	IB12-10F	IB12-10 WO	IB12-10F WO

Length	FIBERGLASS		FIBERGLASS	
	Booted / Tapered	Booted / Flared	Flush / Tapered	Flush / Flared
5"	FX12-5	FX12-5F	FX12-5 WO	FX12-5F WO
6"	FX12-6	FX12-6F	FX12-6 WO	FX12-6F WO
8"	FX12-8	FX12-8F	FX12-8 WO	FX12-8F WO
14"	FX12-14	FX12-14F	FX12-14 WO	FX12-14F WO
20"	FX12-20	FX12-20F	FX12-20 WO	FX12-20F WO
24"	FX12-24	FX12-24F	FX12-24 WO	FX12-24F WO
30"	FX12-30	FX12-30F	FX12-30 WO	FX12-30F WO

* Available in WOBBLE and WOBBLE / FIXED **43**

Tools comply with ASTM F1505 and IEC 60900 standards and help meet the requirements of OSHA 1910.331-335, NFPA 70E®, and CSA-Z462.

Flexible Extension Bar

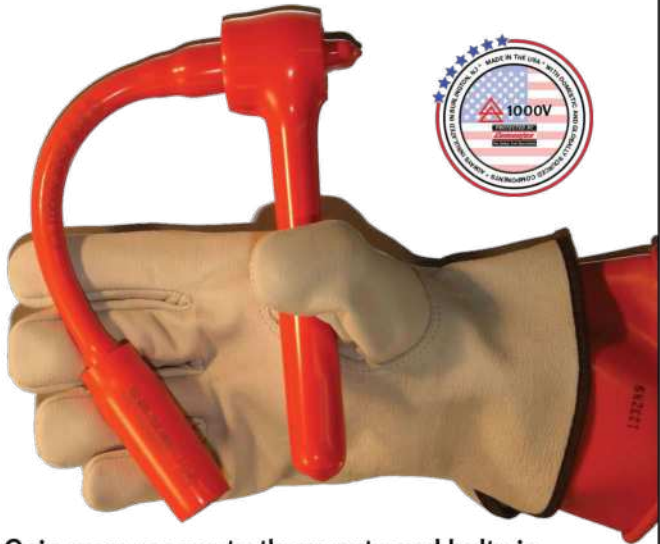

Gain easy access to those nuts and bolts in difficult locations. Make quick work of tough jobs with this truly unique and innovative tool.

PN _____ DESC _____
 IB38-8F..... 3/8" Square Drive, 8" Flexible Extension Bar

Fiberglass Extension Bar



This beast of an extension may be used with 1/2" square drive sockets and a variety of 3/4" wrench options (Box End, Geared, etc...)

PN _____ DESC _____
 FX12-1224H....12" Fiberglass Extension Bar with
 1/2" Square Drive Head and
 3/4" Hex Drive Head

Socket Adapters



14F38M



38F12M



38F12M WO



38F14M WO



38F14M



12F38M



12F38M WO

- PN _____ DESC _____
- 14F38M.....1/4" Female - 3/8" Male
 - 14F38M W/W.....1/4" Female - 3/8" Male Flared Drive Head
 - 38F14M.....3/8" Female - 1/4" Male
 - 38F14M W/W.....3/8" Female - 1/4" Male Flared Drive Head
 - 38F14M-6.....3/8" Female - 1/4" Male 6" OAL
 - 38F14M-2.75.....3/8" Female - 1/4" Male 2-3/4" OAL
 - 38F12M.....3/8" Female - 1/2" Male
 - 38F12M W/W.....3/8" Female - 1/2" Male Flared Drive Head
 - 38F12M WO.....3/8" Female Flush Connect Drive Socket - 1/2" Male
 - 12F38M.....1/2" Female - 3/8" Male with Boot
 - 12F38ML.....1/2" Female - 3/8" Male Extender
 - 12F38M-4.....1/2" Female - 3/8" Male 4" OAL
 - 12F38M WO.....1/2" Female Flush Connect Drive Socket - 3/8" Male
 - 12F34M.....1/2" Female - 3/4" Male
 - 34F12M.....3/4" Female - 2-1/4" Male



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts



Sockets

Cementex offers 1000V rated insulated sockets for use with insulated tools including; ratchets, torque wrenches, extensions bars, T-Handled square drives, breaker bars, etc.

Cementex's unique coating technique allows the socket to be shaped in a way that the insulation is slimmer at the point of contact with the nut or bolt. This allows Cementex insulated sockets to access equipment where other manufacturer's sockets won't fit.

Refer to our *Interchangeable Tool Compatibility information (pg 42)* to assess / confirm proper compatibility, compliance and coverage.

1/4" Square Drive: SAE

	<u>STANDARD</u>	<u>DEEP</u>
<u>SIZE</u>	<u>WALL</u>	<u>WALL</u>
5/32"	IS14-05	IS14-05L
3/16"	IS14-06	IS14-06L
7/32"	IS14-07	IS14-07L
1/4"	IS14-08	IS14-08L
9/32"	IS14-09	IS14-09L
5/16"	IS14-10	IS14-10L
11/32"	IS14-11	IS14-11L
3/8"	IS14-12	IS14-12L
7/16"	IS14-14	IS14-14L
1/2"	IS14-16	IS14-16L
9/16"	IS14-18	IS14-18L



1/4" Square Drive: Metric

	<u>STANDARD</u>	<u>DEEP</u>
<u>SIZE</u>	<u>WALL</u>	<u>WALL</u>
4mm	IS14-04M	IS14-04ML
4.5mm	IS14-4.5M	-----
5mm	IS14-05M	IS14-05ML
5.5mm	IS14-5.5M	IS14-5.5ML
6mm	IS14-06M	IS14-06ML
7mm	IS14-07M	IS14-07ML
8mm	IS14-08M	IS14-08ML
9mm	IS14-09M	IS14-09ML
10mm	IS14-10M	IS14-10ML
11mm	IS14-11M	IS14-11ML
12mm	IS14-12M	IS14-12ML
13mm	IS14-13M	IS14-13ML
14mm	IS14-14M	IS14-14ML
15mm	IS14-15M	IS14-15ML



3/8" Square Drive: SAE



6 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
1/4"	IS38-08 6PT	IS38-08 6PT WO	IS38-08L 6PT	IS38-08L 6PT WO
5/16"	IS38-10 6PT	IS38-10 6PT WO	IS38-10L 6PT	IS38-10L 6PT WO
3/8"	IS38-12 6PT	IS38-12 6PT WO	IS38-12L 6PT	IS38-12L 6PT WO
7/16"	IS38-14 6PT	IS38-14 6PT WO	IS38-14L 6PT	IS38-14L 6PT WO
1/2"	IS38-16 6PT	IS38-16 6PT WO	IS38-16L 6PT	IS38-16L 6PTWO
9/16"	IS38-18 6PT	IS38-18 6PT WO	IS38-18L 6PT	IS38-18L 6PT WO
5/8"	IS38-20 6PT	IS38-20 6PT WO	IS38-20L 6PT	IS38-20L 6PT WO
11/16"	IS38-22 6PT	IS38-22 6PT WO	IS38-22L 6PT	IS38-22L 6PT WO
3/4"	IS38-24 6PT	IS38-24 6PT WO	IS38-24L 6PT	IS38-24L 6PT WO
13/16"	IS38-26 6PT	IS38-26 6PT WO	IS38-26L 6PT	IS38-26L 6PT WO
7/8"	IS38-28 6PT	IS38-28 6PT WO	IS38-28L 6PT	IS38-28L 6PT WO
15/16"	IS38-30 6PT	IS38-30 6PT WO	IS38-30L 6PT	IS38-30L 6PT WO
1"	IS38-32 6PT	IS38-32 6PT WO	IS38-32L 6PT	IS38-32L 6PT WO

12 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
1/4"	IS38-08	IS38-08 12PT WO	IS38-08L	IS38-08L 12PT WO
5/16"	IS38-10	IS38-10 12PT WO	IS38-10L	IS38-10L 12PT WO
3/8"	IS38-12	IS38-12 12PT WO	IS38-12L	IS38-12L 12PT WO
7/16"	IS38-14	IS38-14 12PT WO	IS38-14L	IS38-14L 12PT WO
1/2"	IS38-16	IS38-16 12PT WO	IS38-16L	IS38-16L 12PT WO
9/16"	IS38-18	IS38-18 12PT WO	IS38-18L	IS38-18L 12PT WO
5/8"	IS38-20	IS38-20 12PT WO	IS38-20L	IS38-20L 12PT WO
11/16"	IS38-22	IS38-22 12PT WO	IS38-22L	IS38-22L 12PT WO
3/4"	IS38-24	IS38-24 12PT WO	IS38-24L	IS38-24L 12PT WO
13/16"	IS38-26	IS38-26 12PT WO	IS38-26L	IS38-26L 12PT WO
7/8"	IS38-28	IS38-28 12PT WO	IS38-28L	IS38-28L 12PT WO
15/16"	IS38-30	IS38-30 12PT WO	IS38-30L	IS38-30L 12PT WO
1"	IS38-32	IS38-32 12PT WO	IS38-32L	IS38-32L 12PT WO
1-1/16"	IS38-34	IS38-34 12PT WO	IS38-34L	IS38-34L 12PT WO
1-1/8"	IS38-36	IS38-36 12PT WO	IS38-36L	IS38-36L 12PT WO

Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.

Sockets

RATED 1000 VAC 1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts



3/8" Square Drive: Metric



6 Point

<u>SIZE</u>	<u>STANDARD WALL</u>	<u>STANDARD WALL FLUSH CONNECT</u>	<u>DEEP WALL</u>	<u>DEEP WALL FLUSH CONNECT</u>
5mm	IS38-05M 6PT	IS38-05M 6PT WO	IS38-05ML 6PT	IS38-05ML 6PT WO
6mm	IS38-06M 6PT	IS38-06M 6PT WO	IS38-06ML 6PT	IS38-06ML 6PT WO
7mm	IS38-07M 6PT	IS38-07M 6PT WO	IS38-07ML 6PT	IS38-07ML 6PT WO
8mm	IS38-08M 6PT	IS38-08M 6PT WO	IS38-08ML 6PT	IS38-08ML 6PT WO
9mm	IS38-09M 6PT	IS38-09M 6PT WO	IS38-09ML 6PT	IS38-09ML 6PT WO
10mm	IS38-10M 6PT	IS38-10M 6PT WO	IS38-10ML 6PT	IS38-10ML 6PT WO
11mm	IS38-11M 6PT	IS38-11M 6PT WO	IS38-11ML 6PT	IS38-11ML 6PT WO
12mm	IS38-12M 6PT	IS38-12M 6PT WO	IS38-12ML 6PT	IS38-12ML 6PT WO
13mm	IS38-13M 6PT	IS38-13M 6PT WO	IS38-13ML 6PT	IS38-13ML 6PT WO
14mm	IS38-14M 6PT	IS38-14M 6PT WO	IS38-14ML 6PT	IS38-14ML 6PT WO
15mm	IS38-15M 6PT	IS38-15M 6PT WO	IS38-15ML 6PT	IS38-15ML 6PT WO
16mm	IS38-16M 6PT	IS38-16M 6PT WO	IS38-16ML 6PT	IS38-16ML 6PT WO
17mm	IS38-17M 6PT	IS38-17M 6PT WO	IS38-17ML 6PT	IS38-17ML 6PT WO
18mm	IS38-18M 6PT	IS38-18M 6PT WO	IS38-18ML 6PT	IS38-18ML 6PT WO
19mm	IS38-19M 6PT	IS38-19M 6PT WO	IS38-19ML 6PT	IS38-19ML 6PT WO
20mm	IS38-20M 6PT	IS38-20M 6PT WO	IS38-20ML 6PT	IS38-20ML 6PT WO
21mm	IS38-21M 6PT	IS38-21M 6PT WO	IS38-21ML 6PT	IS38-21ML 6PT WO
22mm	IS38-22M 6PT	IS38-22M 6PT WO	IS38-22ML 6PT	IS38-22ML 6PT WO



12 Point

<u>SIZE</u>	<u>STANDARD WALL</u>	<u>STANDARD WALL FLUSH CONNECT</u>	<u>DEEP WALL</u>	<u>DEEP WALL FLUSH CONNECT</u>
5mm	IS38-05M	IS38-05M 12PT WO	IS38-05ML	IS38-05ML 12PT WO
6mm	IS38-06M	IS38-06M 12PT WO	IS38-06ML	IS38-06ML 12PT WO
7mm	IS38-07M	IS38-07M 12PT WO	IS38-07ML	IS38-07ML 12PT WO
8mm	IS38-08M	IS38-08M 12PT WO	IS38-08ML	IS38-08ML 12PT WO
9mm	IS38-09M	IS38-09M 12PT WO	IS38-09ML	IS38-09ML 12PT WO
10mm	IS38-10M	IS38-10M 12PT WO	IS38-10ML	IS38-10ML 12PT WO
11mm	IS38-11M	IS38-11M 12PT WO	IS38-11ML	IS38-11ML 12PT WO
12mm	IS38-12M	IS38-12M 12PT WO	IS38-12ML	IS38-12ML 12PT WO
13mm	IS38-13M	IS38-13M 12PT WO	IS38-13ML	IS38-13ML 12PT WO
14mm	IS38-14M	IS38-14M 12PT WO	IS38-14ML	IS38-14ML 12PT WO
15mm	IS38-15M	IS38-15M 12PT WO	IS38-15ML	IS38-15ML 12PT WO
16mm	IS38-16M	IS38-16M 12PT WO	IS38-16ML	IS38-16ML 12PT WO
17mm	IS38-17M	IS38-17M 12PT WO	IS38-17ML	IS38-17ML 12PT WO
18mm	IS38-18M	IS38-18M 12PT WO	IS38-18ML	IS38-18ML 12PT WO
19mm	IS38-19M	IS38-19M 12PT WO	IS38-19ML	IS38-19ML 12PT WO
20mm	IS38-20M	IS38-20M 12PT WO	IS38-20ML	IS38-20ML 12PT WO
21mm	IS38-21M	IS38-21M 12PT WO	IS38-21ML	IS38-21ML 12PT WO
22mm	IS38-22M	IS38-22M 12PT WO	IS38-22ML	IS38-22ML 12PT WO
23mm	IS38-23M	IS38-23M 12PT WO	IS38-23ML	IS38-23ML 12PT WO
24mm	IS38-24M	IS38-24M 12PT WO	IS38-24ML	IS38-24ML 12PT WO
25mm	IS38-25M	IS38-25M 12PT WO	IS38-25ML	IS38-25ML 12PT WO

Sockets

RATED
1000 VAC / 1500 JOC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.

1/2" Square Drive: SAE

****Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.****

Sockets



6 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
5/16"	IS12-10 6PT	IS12-10 6PT WO	IS12-10L 6PT	IS12-10L 6PT WO
3/8"	IS12-12 6PT	IS12-12 6PT WO	IS12-12L 6PT	IS12-12L 6PT WO
7/16"	IS12-14 6PT	IS12-14 6PT WO	IS12-14L 6PT	IS12-14L 6PT WO
1/2"	IS12-16 6PT	IS12-16 6PT WO	IS12-16L 6PT	IS12-16L 6PT WO
9/16"	IS12-18 6PT	IS12-18 6PT WO	IS12-18L 6PT	IS12-18L 6PT WO
5/8"	IS12-20 6PT	IS12-20 6PT WO	IS12-20L 6PT	IS12-20L 6PT WO
11/16"	IS12-22 6PT	IS12-22 6PT WO	IS12-22L 6PT	IS12-22L 6PT WO
3/4"	IS12-24 6PT	IS12-24 6PT WO	IS12-24L 6PT	IS12-24L 6PT WO
13/16"	IS12-26 6PT	IS12-26 6PT WO	IS12-26L 6PT	IS12-26L 6PT WO
7/8"	IS12-28 6PT	IS12-28 6PT WO	IS12-28L 6PT	IS12-28L 6PT WO
15/16"	IS12-30 6PT	IS12-30 6PT WO	IS12-30L 6PT	IS12-30L 6PT WO
1"	IS12-32 6PT	IS12-32 6PT WO	IS12-32L 6PT	IS12-32L 6PT WO
1-1/16"	IS12-34 6PT	IS12-34 6PT WO	IS12-34L 6PT	IS12-34L 6PT WO
1-1/8"	IS12-36 6PT	IS12-36 6PT WO	IS12-36L 6PT	IS12-36L 6PT WO
1-3/16"	IS12-38 6PT	IS12-38 6PT WO	IS12-38L 6PT	IS12-38L 6PT WO
1-1/4"	IS12-40 6PT	IS12-40 6PT WO	IS12-40L 6PT	IS12-40L 6PT WO
1-5/16"	IS12-42 6PT	IS12-42 6PT WO	IS12-42L 6PT	IS12-42L 6PT WO
1-3/8"	IS12-44 6PT	IS12-44 6PT WO	IS12-44L 6PT	IS12-44L 6PT WO
1-7/16"	IS12-46 6PT	IS12-46 6PT WO	IS12-46L 6PT	IS12-46L 6PT WO
1-1/2"	IS12-48 6PT	IS12-48 6PT WO	IS12-48L 6PT	IS12-48L 6PT WO
1-9/16"	IS12-50 6PT	IS12-50 6PT WO	IS12-50L 6PT	IS12-50L 6PT WO

12 Point

SIZE	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
1/4"	IS12-08	IS12-08 12PT WO	IS12-08L	IS12-08L 12PT WO
5/16"	IS12-10	IS12-10 12PT WO	IS12-10L	IS12-10L 12PT WO
3/8"	IS12-12	IS12-12 12PT WO	IS12-12L	IS12-12L 12PT WO
7/16"	IS12-14	IS12-14 12PT WO	IS12-14L	IS12-14L 12PT WO
1/2"	IS12-16	IS12-16 12PT WO	IS12-16L	IS12-16L 12PT WO
9/16"	IS12-18	IS12-18 12PT WO	IS12-18L	IS12-18L 12PT WO
5/8"	IS12-20	IS12-20 12PT WO	IS12-20L	IS12-20L 12PT WO
11/16"	IS12-22	IS12-22 12PT WO	IS12-22L	IS12-22L 12PT WO
3/4"	IS12-24	IS12-24 12PT WO	IS12-24L	IS12-24L 12PT WO
13/16"	IS12-26	IS12-26 12PT WO	IS12-26L	IS12-26L 12PT WO
7/8"	IS12-28	IS12-28 12PT WO	IS12-28L	IS12-28L 12PT WO
15/16"	IS12-30	IS12-30 12PT WO	IS12-30L	IS12-30L 12PT WO
1"	IS12-32	IS12-32 12PT WO	IS12-32L	IS12-32L 12PT WO
1-1/16"	IS12-34	IS12-34 12PT WO	IS12-34L	IS12-34L 12PT WO
1-1/8"	IS12-36	IS12-36 12PT WO	IS12-36L	IS12-36L 12PT WO
1-3/16"	IS12-38	IS12-38 12PT WO	IS12-38L	IS12-38L 12PT WO
1-1/4"	IS12-40	IS12-40 12PT WO	IS12-40L	IS12-40L 12PT WO
1-5/16"	IS12-42	IS12-42 12PT WO	IS12-42L	IS12-42L 12PT WO
1-3/8"	IS12-44	IS12-44 12PT WO	IS12-44L	IS12-44L 12PT WO
1-7/16"	IS12-46	IS12-46 12PT WO	IS12-46L	IS12-46L 12PT WO
1-1/2"	IS12-48	IS12-48 12PT WO	IS12-48L	IS12-48L 12PT WO
1-9/16"	IS12-50	IS12-50 12PT WO	IS12-50L	IS12-50L 12PT WO
1-5/8"	IS12-52	IS12-52 12PT WO	IS12-52L	IS12-52L 12PT WO
1-11/16"	IS12-54	IS12-54 12PT WO	IS12-54L	IS12-54L 12PT WO
1-3/4"	IS12-56	IS12-56 12PT WO	IS12-56L	IS12-56L 12PT WO

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts



1/2" Square Drive: Metric

Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.

6 Point

SIZE__	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
8mm	IS12-08M 6PT	IS12-08M 6PT WO	IS12-08ML 6PT	IS12-08ML 6PT WO
9mm	IS12-09M 6PT	IS12-09M 6PT WO	IS12-09ML 6PT	IS12-09ML 6PT WO
10mm	IS12-10M 6PT	IS12-10M 6PT WO	IS12-10ML 6PT	IS12-10ML 6PT WO
11mm	IS12-11M 6PT	IS12-11M 6PT WO	IS12-11ML 6PT	IS12-11ML 6PT WO
12mm	IS12-12M 6PT	IS12-12M 6PT WO	IS12-12ML 6PT	IS12-12ML 6PT WO
13mm	IS12-13M 6PT	IS12-13M 6PT WO	IS12-13ML 6PT	IS12-13ML 6PT WO
14mm	IS12-14M 6PT	IS12-14M 6PT WO	IS12-14ML 6PT	IS12-14ML 6PT WO
15mm	IS12-15M 6PT	IS12-15M 6PT WO	IS12-15ML 6PT	IS12-15ML 6PT WO
16mm	IS12-16M 6PT	IS12-16M 6PT WO	IS12-16ML 6PT	IS12-16ML 6PT WO
17mm	IS12-17M 6PT	IS12-17M 6PT WO	IS12-17ML 6PT	IS12-17ML 6PT WO
18mm	IS12-18M 6PT	IS12-18M 6PT WO	IS12-18ML 6PT	IS12-18ML 6PT WO
19mm	IS12-19M 6PT	IS12-19M 6PT WO	IS12-19ML 6PT	IS12-19ML 6PT WO
20mm	IS12-20M 6PT	IS12-20M 6PT WO	IS12-20ML 6PT	IS12-20ML 6PT WO
21mm	IS12-21M 6PT	IS12-21M 6PT WO	IS12-21ML 6PT	IS12-21ML 6PT WO
22mm	IS12-22M 6PT	IS12-22M 6PT WO	IS12-22ML 6PT	IS12-22ML 6PT WO
23mm	IS12-23M 6PT	IS12-23M 6PT WO	IS12-23ML 6PT	IS12-23ML 6PT WO
24mm	IS12-24M 6PT	IS12-24M 6PT WO	IS12-24ML 6PT	IS12-24ML 6PT WO
25mm	IS12-25M 6PT	IS12-25M 6PT WO	IS12-25ML 6PT	IS12-25ML 6PT WO
26mm	IS12-26M 6PT	IS12-26M 6PT WO	IS12-26ML 6PT	IS12-26ML 6PT WO
27mm	IS12-27M 6PT	IS12-27M 6PT WO	IS12-27ML 6PT	IS12-27ML 6PT WO
28mm	IS12-28M 6PT	IS12-28M 6PT WO	IS12-28ML 6PT	IS12-28ML 6PT WO
29mm	IS12-29M 6PT	IS12-29M 6PT WO	IS12-29ML 6PT	IS12-29ML 6PT WO
30mm	IS12-30M 6PT	IS12-30M 6PT WO	IS12-30ML 6PT	IS12-30ML 6PT WO
32mm	IS12-32M 6PT	IS12-32M 6PT WO	IS12-32ML 6PT	IS12-32ML 6PT WO
36mm	IS12-36M 6PT	IS12-36M 6PT WO	IS12-36ML 6PT	IS12-36ML 6PT WO



12 Point

SIZE__	STANDARD WALL	STANDARD WALL FLUSH CONNECT	DEEP WALL	DEEP WALL FLUSH CONNECT
8mm	IS12-08M	IS12-08M 12PT WO	IS12-08ML	IS12-08ML 12PT WO
9mm	IS12-09M	IS12-09M 12PT WO	IS12-09ML	IS12-09ML 12PT WO
10mm	IS12-10M	IS12-10M 12PT WO	IS12-10ML	IS12-10ML 12PT WO
11mm	IS12-11M	IS12-11M 12PT WO	IS12-11ML	IS12-11ML 12PT WO
12mm	IS12-12M	IS12-12M 12PT WO	IS12-12ML	IS12-12ML 12PT WO
13mm	IS12-13M	IS12-13M 12PT WO	IS12-13ML	IS12-13ML 12PT WO
14mm	IS12-14M	IS12-14M 12PT WO	IS12-14ML	IS12-14ML 12PT WO
15mm	IS12-15M	IS12-15M 12PT WO	IS12-15ML	IS12-15ML 12PT WO
16mm	IS12-16M	IS12-16M 12PT WO	IS12-16ML	IS12-16ML 12PT WO
17mm	IS12-17M	IS12-17M 12PT WO	IS12-17ML	IS12-17ML 12PT WO
18mm	IS12-18M	IS12-18M 12PT WO	IS12-18ML	IS12-18ML 12PT WO
19mm	IS12-19M	IS12-19M 12PT WO	IS12-19ML	IS12-19ML 12PT WO
20mm	IS12-20M	IS12-20M 12PT WO	IS12-20ML	IS12-20ML 12PT WO
21mm	IS12-21M	IS12-21M 12PT WO	IS12-21ML	IS12-21ML 12PT WO
22mm	IS12-22M	IS12-22M 12PT WO	IS12-22ML	IS12-22ML 12PT WO
23mm	IS12-23M	IS12-23M 12PT WO	IS12-23ML	IS12-23ML 12PT WO
24mm	IS12-24M	IS12-24M 12PT WO	IS12-24ML	IS12-24ML 12PT WO
25mm	IS12-25M	IS12-25M 12PT WO	IS12-25ML	IS12-25ML 12PT WO
26mm	IS12-26M	IS12-26M 12PT WO	IS12-26ML	IS12-26ML 12PT WO
27mm	IS12-27M	IS12-27M 12PT WO	IS12-27ML	IS12-27ML 12PT WO
28mm	IS12-28M	IS12-28M 12PT WO	IS12-28ML	IS12-28ML 12PT WO
29mm	IS12-29M	IS12-29M 12PT WO	IS12-29ML	IS12-29ML 12PT WO
30mm	IS12-30M	IS12-30M 12PT WO	IS12-30ML	IS12-30ML 12PT WO
32mm	IS12-32M	IS12-32M 12PT WO	IS12-32ML	IS12-32ML 12PT WO
36mm	IS12-36M	IS12-36M 12PT WO	IS12-36ML	IS12-36ML 12PT WO

Sockets



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Penta



IS38-26 PENTA

Penta sockets, also known as 5-point sockets, are used as tamper-resistant fasteners because they don't have two opposite sides. These 1000V rated sockets are extra thick for increased impact.

Additional sizes available upon request.

SIZE__	<u>3/8" Drive</u> <u>STD WALL</u>	<u>1/2" Drive</u> <u>STD WALL</u>
13/16"	IS38-26 PENTA	IS12-26 PENTA

Impact



Impact sockets are made with extra-thick sidewalls to withstand the shock and vibration of each impact. Beaks and / or cracks are prevented by the chrome molybdenum steel, which adds elasticity to the socket. Impact sockets have sidewalls that are 50% thicker than standard sockets, and are finished in a black oxide finish. Impact sockets are suitable for use with pneumatic impact tools, such as electric or pneumatic wrenches, to remove seized nuts and bolts. They are less shatter-prone and anti-corrosive.

If you do not see the size that you need, simply ask and we will do our best to provide it.

SAE__	<u>3/8" Drive</u> <u>6 Point</u> <u>STD WALL</u>	<u>3/8" Drive</u> <u>6 Point</u> <u>DEEP WALL</u>	<u>1/2" Drive</u> <u>6 Point</u> <u>DEEP WALL</u>	METRIC	<u>3/8" Drive</u> <u>6 Point</u> <u>STD WALL</u>
	1/2"	IS38-16-IMPACT	IS38-16L-IMPACT		IS12-16L-IMPACT
9/16"	IS38-18-IMPACT	IS38-18L-IMPACT	IS12-18L-IMPACT	12mm	IS38-12M-IMPACT
5/8"	IS38-20-IMPACT	IS38-20L-IMPACT	IS12-20L-IMPACT	13mm	IS38-13M-IMPACT
3/4"	IS38-24-IMPACT	IS38-24L-IMPACT	IS12-24L-IMPACT	14mm	IS38-14M-IMPACT
1-1/2"	-	IS38-48L-IMPACT	IS12-48L-IMPACT	15mm	IS38-15M-IMPACT
1-9/16"	-	IS38-50L-IMPACT	IS12-50L-IMPACT	16mm	IS38-16M-IMPACT
1-5/8"	-	IS38-52L-IMPACT	IS12-52L-IMPACT	17mm	IS38-17M-IMPACT
1-11/16"	-	IS38-54L-IMPACT	IS12-54L-IMPACT	18mm	IS38-18M-IMPACT
1-5/8"	-	IS38-56L-IMPACT	IS12-56L-IMPACT	19mm	IS38-19M-IMPACT

Crows Foot Wrench



Crows Foot Wrenches are used with a ratchet or torque wrench to access fasteners in tight or hard-to-reach spaces. They are particularly useful for reaching nuts / bolts obstructed by other components. Additional sizes available upon request.

<u>3/8" Square Drive</u>			
SIZE__	SAE	SIZE__	Metric
7/16"	ICFW38-716	10mm	ICFW38-10M
1/2"	ICFW38-120	12mm	ICFW38-12M
9/16"	ICFW38-916	13mm	ICFW38-13M
5/8"	ICFW38-580	17mm	ICFW38-17M
3/4"	ICFW38-340	19mm	ICFW38-19M



Flat Tip Screw Driver Bit Sockets



Driver Bit Sockets

	1/4" Square Drive				3/8" Square Drive				1/2" Square Drive			
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH	
	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH
1/4"	IF14-140	IF14-140 WO	IF14-140XL	IF14-140XL WO	IF38-140	IF38-140 WO	IF38-140XL	IF38-140XL WO	IF12-140L	IF12-140L WO	IF12-140XL	IF12-140XL WO
5/16"	IF14-516	IF14-516 WO	IF14-516XL	IF14-516XL WO	IF38-516	IF38-516 WO	IF38-516XL	IF38-516XL WO	IF12-516L	IF12-516L WO	IF12-516XL	IF12-516XL WO
3/8"	IF14-380	IF14-380 WO	IF14-380XL	IF14-380XL WO	IF38-380	IF38-380 WO	IF38-380XL	IF38-380XL WO	IF12-380L	IF12-380L WO	IF12-380XL	IF12-380XL WO
1/2"	IF14-120	IF14-120 WO	IF14-120XL	IF14-120XL WO	IF38-120	IF38-120 WO	IF38-120XL	IF38-120XL WO	IF12-120L	IF12-120L WO	IF12-120XL	IF12-120XL WO

Phillips Tip Screw Driver Bit Sockets



	1/4" Square Drive				3/8" Square Drive				1/2" Square Drive			
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH	
	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH
#1	IP14-01	IP14-01 WO	IP14-01XL	IP14-01XL WO	IP38-01	IP38-01 WO	IP38-01XL	IP38-01XL WO	IP12-01L	IP12-01L WO	IP12-01XL	IP12-01XL WO
#2	IP14-02	IP14-02 WO	IP14-02XL	IP14-02XL WO	IP38-02	IP38-02 WO	IP38-02XL	IP38-02XL WO	IP12-02L	IP12-02L WO	IP12-02XL	IP12-02XL WO
#3	IP14-03	IP14-03 WO	IP14-03XL	IP14-03XL WO	IP38-03	IP38-03 WO	IP38-03XL	IP38-03XL WO	IP12-03L	IP12-03L WO	IP12-03XL	IP12-03XL WO
#4	-	-	-	-	-	-	-	-	IP12-04L	IP12-04L WO	IP12-04XL	IP12-04XL WO

RATED 1000 VAC 1500 DC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Torx® Bit Sockets



	1/4" Square Drive				3/8" Square Drive				1/2" Square Drive			
	3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH		3" LENGTH		6" LENGTH	
	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH	BOOTED	FLUSH
T8	IT14-T8	IT14-T8 WO	IT14-T8XL	IT14-T8XL WO	IT38-T8	IT38-T8 WO	IT38-T8XL	IT38-T8XL WO	IT12-T8	IT12-T8 WO	IT12-T8XL	IT12-T8XL WO
T10	IT14-T10	IT14-T10 WO	IT14-T10XL	IT14-T10XL WO	IT38-T10	IT38-T10 WO	IT38-T10XL	IT38-T10XL WO	IT12-T10	IT12-T10 WO	IT12-T10XL	IT12-T10XL WO
T15	IT14-T15	IT14-T15 WO	IT14-T15XL	IT14-T15XL WO	IT38-T15	IT38-T15 WO	IT38-T15XL	IT38-T15XL WO	IT12-T15	IT12-T15 WO	IT12-T15XL	IT12-T15XL WO
T20	IT14-T20	IT14-T20 WO	IT14-T20XL	IT14-T20XL WO	IT38-T20	IT38-T20 WO	IT38-T20XL	IT38-T20XL WO	IT12-T20	IT12-T20 WO	IT12-T20XL	IT12-T20XL WO
T25	IT14-T25	IT14-T25 WO	IT14-T25XL	IT14-T25XL WO	IT38-T25	IT38-T25 WO	IT38-T25XL	IT38-T25XL WO	IT12-T25	IT12-T25 WO	IT12-T25XL	IT12-T25XL WO
T27	IT14-T27	IT14-T27 WO	IT14-T27XL	IT14-T27XL WO	IT38-T27	IT38-T27 WO	IT38-T27XL	IT38-T27XL WO	IT12-T27	IT12-T27 WO	IT12-T27XL	IT12-T27XL WO
T30	IT14-T30	IT14-T30 WO	IT14-T30XL	IT14-T30XL WO	IT38-T30	IT38-T30 WO	IT38-T30XL	IT38-T30XL WO	IT12-T30	IT12-T30 WO	IT12-T30XL	IT12-T30XL WO
T40	IT14-T40	IT14-T40 WO	IT14-T40XL	IT14-T40XL WO	IT38-T40	IT38-T40 WO	IT38-T40XL	IT38-T40XL WO	IT12-T40	IT12-T40 WO	IT12-T40XL	IT12-T40XL WO
T45	IT14-T45	IT14-T45 WO	IT14-T45XL	IT14-T45XL WO	IT38-T45	IT38-T45 WO	IT38-T45XL	IT38-T45XL WO	IT12-T45	IT12-T45 WO	IT12-T45XL	IT12-T45XL WO
T50	IT14-T50	IT14-T50 WO	IT14-T50XL	IT14-T50XL WO	IT38-T50	IT38-T50 WO	IT38-T50XL	IT38-T50XL WO	IT12-T50	IT12-T50 WO	IT12-T50XL	IT12-T50XL WO
T55	IT14-T55	IT14-T55 WO	IT14-T55XL	IT14-T55XL WO	IT38-T55	IT38-T55 WO	IT38-T55XL	IT38-T55XL WO	IT12-T55	IT12-T55 WO	IT12-T55XL	IT12-T55XL WO

Square Drive Bit Sockets



	3/8" Square Drive			
	3" LENGTH		6" LENGTH	
	BOOTED	FLUSH	BOOTED	FLUSH
#0	ID38-0	ID38-0 WO	ID38-0XL	ID38-0XL WO
#1	ID38-1	ID38-1 WO	ID38-1XL	ID38-1XL WO
#2	ID38-2	ID38-2 WO	ID38-2XL	ID38-2XL WO
#3	ID38-3	ID38-3 WO	ID38-3XL	ID38-3XL WO

Hex Bit Sockets

Cementex Hex Bit Sockets are now available in our standard “Booted” style as well as in our “Flush Connect” configuration. This “Booted” style matches that of our standard sockets and is designed for direct connection to the Cementex X-Drive® ratchets, torque wrenches, and standard extension bars; providing complete coverage of conductive materials. All 1/4” square drive sockets from Cementex are only offered as the “Flush Connect” style.

Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.

Hex Bit Sockets



1/4” Square Drive SAE

SIZE	3” LENGTH	6” LENGTH
3/16”	IH14-06	IH14-06XL
7/32”	IH14-07	IH14-07XL
1/4”	IH14-08	IH14-08XL
5/16”	IH14-10	IH14-10XL
3/8”	IH14-12	IH14-12XL
7/16”	IH14-14	IH14-14XL
1/2”	IH14-16	IH14-16XL

RATED 1000 VAC 1500 VDC



3/8” Square Drive SAE

SIZE	3” Length		6” Length	
	Booted	Flush Connect	Booted	Flush Connect
1/8”	IH38-04	IH38-04 WO	IH38-04XL	IH38-04XL WO
9/64”	IH38-4.5	IH38-4.5 WO	IH38-4.5XL	IH38-4.5XL WO
5/32”	IH38-05	IH38-05 WO	IH38-05XL	IH38-05XL WO
3/16”	IH38-06	IH38-06 WO	IH38-06XL	IH38-06XL WO
7/32”	IH38-07	IH38-07 WO	IH38-07XL	IH38-07XL WO
1/4”	IH38-08	IH38-08 WO	IH38-08XL	IH38-08XL WO
5/16”	IH38-10	IH38-10 WO	IH38-10XL	IH38-10XL WO
3/8”	IH38-12	IH38-12 WO	IH38-12XL	IH38-12XL WO
7/16”	IH38-14	IH38-14 WO	IH38-14XL	IH38-14XL WO
1/2”	IH38-16	IH38-16 WO	IH38-16XL	IH38-16XL WO
9/16”	IH38-18	IH38-18 WO	IH38-18XL	IH38-18XL WO
5/8”	IH38-20	IH38-20 WO	IH38-20XL	IH38-20XL WO
3/4”	IH38-24	IH38-24 WO	IH38-24XL	IH38-24XL WO
7/8”	IH38-28	IH38-28 WO	IH38-28XL	IH38-28XL WO

1/2” Square Drive

SIZE	3” Length		6” Length	
	Booted	Flush Connect	Booted	Flush Connect
1/4”	IH12-08	IH12-08 WO	IH12-08XL	IH12-08XL WO
5/16”	IH12-10	IH12-10 WO	IH12-10XL	IH12-10XL WO
3/8”	IH12-12	IH12-12 WO	IH12-12XL	IH12-12XL WO
7/16”	IH12-14	IH12-14 WO	IH12-14XL	IH12-14XL WO
1/2”	IH12-16	IH12-16 WO	IH12-16XL	IH12-16XL WO
9/16”	IH12-18	IH12-18 WO	IH12-18XL	IH12-18XL WO
5/8”	IH12-20	IH12-20 WO	IH12-20XL	IH12-20XL WO
3/4”	IH12-24	IH12-24 WO	IH12-24XL	IH12-24XL WO



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts



1/4" Square Drive Metric

SIZE	3" LENGTH	6" LENGTH
4mm	IH14-04M	IH14-04MXL
5mm	IH14-05M	IH14-05MXL
6mm	IH14-06M	IH14-06MXL
7mm	IH14-07M	IH14-07MXL
8mm	IH14-08M	IH14-08MXL
9mm	IH14-09M	IH14-09MXL
10mm	IH14-10M	IH14-10MXL

****Refer to our Interchangeable Tool Compatibility information (pg 42) to assess / confirm proper compatibility, compliance and coverage.****

3/8" Square Drive Metric

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
4mm	IH38-04M	IH38-04M WO	IH38-04MXL	IH38-04MXL WO
5mm	IH38-05M	IH38-05M WO	IH38-05MXL	IH38-05MXL WO
6mm	IH38-06M	IH38-06M WO	IH38-06MXL	IH38-06MXL WO
7mm	IH38-07M	IH38-07M WO	IH38-07MXL	IH38-07MXL WO
8mm	IH38-08M	IH38-08M WO	IH38-08MXL	IH38-08MXL WO
9mm	IH38-09M	IH38-09M WO	IH38-09MXL	IH38-09MXL WO
10mm	IH38-10M	IH38-10M WO	IH38-10MXL	IH38-10MXL WO
11mm	IH38-11M	IH38-11M WO	IH38-11MXL	IH38-11MXL WO
12mm	IH38-12M	IH38-12M WO	IH38-12MXL	IH38-12MXL WO
13mm	IH38-13M	IH38-13M WO	IH38-13MXL	IH38-13MXL WO
14mm	IH38-14M	IH38-14M WO	IH38-14MXL	IH38-14MXL WO

1/2" Square Drive Metric

SIZE	3" Length		6" Length	
	Booted	Flush Connect	Booted	Flush Connect
6mm	IH12-06M	IH12-06M WO	IH12-06MXL	IH12-06MXL WO
7mm	IH12-07M	IH12-07M WO	IH12-07MXL	IH12-07MXL WO
8mm	IH12-08M	IH12-08M WO	IH12-08MXL	IH12-08MXL WO
10mm	IH12-10M	IH12-10M WO	IH12-10MXL	IH12-10MXL WO
11mm	IH12-11M	IH12-11M WO	IH12-11MXL	IH12-11MXL WO
12mm	IH12-12M	IH12-12M WO	IH12-12MXL	IH12-12MXL WO
14mm	IH12-14M	IH12-14M WO	IH12-14MXL	IH12-14MXL WO
16mm	IH12-16M	IH12-16M WO	IH12-16MXL	IH12-16MXL WO
17mm	IH12-17M	IH12-17M WO	IH12-17MXL	IH12-17MXL WO
18mm	IH12-18M	IH12-18M WO	IH12-18MXL	IH12-18MXL WO



Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

1/4" Square Drive Socket Sets



ISS14-13L

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Sockets</u>	<u>Socket Sizes</u>
ISS14-9L	IR14-LC	2" 3" 6"	6-Pt Deep Wall	3/16" 1/4" 5/16" 3/8" 7/16"
ISS14-13	IR14-LC	3" 6"	6-Pt Std Wall	3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"
ISS14-13L	IR14-LC	3" 6"	6-Pt Deep Wall	3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"
ISS14-14	IR14-LC	3" 6"	6-Pt Std Wall	5/32" 3/16" 7/32" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16"

Metric (All kits Include Driver Roll Pouch 6)

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Sockets</u>	<u>Socket Sizes</u>
ISS14-13M	IR14-LC	2" 3" 6"	6-Pt Std Wall	5 6 7 8 9 10 11 12 13
ISS14-13ML	IR14-LC	2" 3" 6"	6-Pt Deep Wall	6 7 8 9 10 11 12 13 15
ISS14-14M	IR14-LC	2" 3" 6"	6-Pt Std Wall	4 5 6 7 8 9 10 11 12 13 14



ISS14-18



Driver Roll Pouch 6

Combo

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Sockets</u>	<u>Socket Sizes</u>
ISS14-18	IR14-LC	2" 6"	6-Pt Std Wall 3" SAE Hex Bit	3/16" 1/4" 9/32" 5/16" 11/32" 3/8" 7/16" 1/2" 9/16" 3/16" 7/32" 1/4" 5/16"

Driver Roll Pouch 6

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

RATED 1000 VAC 1500 VDC

3/8" Square Drive Socket Sets



ISS38-11 with Driver Roll Pouch 6



ISS38-16L with Blow Molded Case Large

12 - Point Standard Wall - SAE

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Socket Sizes</u>							<u>Case</u>		
ISS38-8	N/A	3"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	Driver Roll Pouch 6		
ISS38-9	IR38-LC		3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	Zippered Pouch	
ISS38-10		5/16" 3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	Zippered Pouch	
ISS38-11	IR38-LC	3" 6"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	Driver Roll Pouch 6	
ISS38-14	IR38-LC	3" 6"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8" 15/16" 1"	Driver Roll Pouch 6

12 - Point Deep Wall - SAE

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Socket Sizes</u>							<u>Case</u>		
ISS38-11L	IR38-LC	3" 6"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	Driver Roll Pouch 6	
ISS38-11L-SO			3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8" 15/16" 1"	Driver Roll Pouch 6
ISS38-13L	IR38-LC	3" 6" 5/16" 3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	Driver Roll Pouch 6	
ISS38-16L	IR38-LC	3" 6" 1/4" 5/16" 3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8" 15/16" 1"	Blow Molded Case, Small	

12 - Point Standard Wall - SAE

<u>Kit PN#</u>	<u>Ratchet</u>	<u>Ext Bars</u>	<u>Socket Sizes</u>							<u>Case</u>	
ISS38-16	IR38-LC	3" 6" 1/4" 5/16" 3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8" 15/16" 1"	N/A

12 - Point Standard Wall Flush Connect - SAE

ISS38-8 W/O			3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	Zippered Pouch
-------------	--	--	------	-------	------	-------	------	--------	------	--------	----------------

Socket Sets

RATED
1000 VAC / 1500 JOC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

3/8" Square Drive Socket Sets

Socket Sets



ISS38-16M W/O
loose in
Snap Closure Case 501



ISS38-10M with
Zippered Pouch

RATED 1000 VAC 1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

12 - Point Standard Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-4M	IR38-LC	3" 6"	10 13 17 19	
ISS38-8M	IR38-LC	3" 6"	9 10 11 12 13	Driver Roll Pouch 6
ISS38-9M	IR38-LC		10 12 13 14 15 16 18 19	Driver Roll Pouch 6
ISS38-10M			10 11 12 13 14 15 16 17 18 19	Zippered Pouch
ISS38-11M	IR38-LC	3" 6"	10 12 13 14 15 16 18 19	Driver Roll Pouch 6
ISS38-13M	IR38-LC	3"	10 11 12 13 14 15 16 17 18 19 22	Driver Roll Pouch 8

12 - Point Deep Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-10ML			10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-13ML	IR38-LC	3"	10 11 12 13 14 15 16 17 18 19 22	Driver Roll Pouch 8
ISS38-13ML-SO			10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6
ISS38-14ML	IR38-LC	3" 6"	9 10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-15ML	IR38-LC	3" 6"	7 8 9 10 11 12 13 14 15 16 17 18 19	Driver Roll Pouch 6
ISS38-19M	IR38-LC	3" 6"	10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6

6 - Point Standard Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-19M 6PT	IR38-LC	3" 6"	10 11 12 13 14 15 16 17 18 19 20 21 22	Driver Roll Pouch 6

6 - Point Deep Wall - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-3ML			6 7 8	Zippered Pouch
ISS38-11ML			9 10 11 12 13 14 15 16 17 18 19	Zippered Pouch

12 - Point Standard Wall Flush Connect - Metric

Kit PN#	Ratchet	Ext Bars	Socket Sizes	Case
ISS38-16M W/O	IR38-LC	3" 6"	7 8 9 10 11 12 13 14 15 16 17 18 19	Snap Closure Case 501

3/8" Square Drive Hex Bit Socket Sets



ISHS-30L

Socket Sets



Rated 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

SAE

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS38-4			3" Hex Bit	1/4" 5/16" 3/8" 7/16"	Zippered Pouch
IHBS38-7			3" Hex Bit	1/8" 3/16" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHBS38-9			3" Hex Bit	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHBS38-13	IR38-LC	3" 6"	3" Hex Bit	1/8" 9/64" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Pocket Pouch 8
IHBS38-7XL			6" Hex Bit	3/16" 7/32" 1/4" 5/16" 3/8" 7/16" 1/2"	Zippered Pouch
IHSS38-7TW	30150TW38I:Torque		3" Hex Bit 6" Hex Bit	5/16" 3/8" 7/16" 5/16" 3/8" 7/16"	Zippered Pouch

Metric

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS38-3M			3" Hex Bit	6 7 8	Zippered Pouch
IHBS38-7M			3" Hex Bit	6 7 8 9 10 11 12	Zippered Pouch
IHBS38-7MXL			6" Hex Bit	6 7 8 9 10 11 12	Zippered Pouch
IHBS38-8M			3" Hex Bit	6 7 8 9 10 11 12 14	Zippered Pouch

Combo Hex Bit and Socket Sets

Sockets and Hex bits in this kit are booted while the extension bars are flush connect to allow non-X-Drive® compatibility.

*** all sockets included in combo kits below are 12 Pt. 6 Pt. available upon request.

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
ISHS-20L	IR38-LC	3" 6"	3" Hex Bit Deep Wall Flush	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8"	Blow Molded Case, Small
ISHS-30L	IR38-LC	3" 6"	3" Hex Bit Std Wall Flush Deep Wall Flush	1/8" 5/32" 3/16" 7/32" 1/4" 5/16" 3/8" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16"	Snap Closure Case 70I

1/2" Square Drive Socket Sets



ISS12-12

Driver Roll Pouch 6

SAE (All kits include 12 Point Sockets unless otherwise noted)

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case	
ISS12-11L-SO	N/A	N/A	Deep Wall	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6	
ISS12-12	IR12-LC	5" 10"	Std Wall	1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Driver Roll Pouch 6	
ISS12-12L	IR12-LC	5" 10"	Deep Wall	1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	Pocket Pouch 12	
ISS12-21 W/O	IR12-LC	(5" flush/ flared)	Std Wall, Flush Conn Deep Wall, Flush Conn	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 1" 7/8" 15/16" 1-1/32" 1-1/4"	1-1/16" 1-1/8" 1-5/16" 1-3/8" 1-7/16" 1-1/2"	Snap Closure Case 701

Metric

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
ISS12-12M	IR12-LC	5" 10"	Std Wall	12 14 16 18 19 21 22 24 25	Pocket Pouch 12
ISS12-18M	IR12-LC	5" 10"	Std Wall	7 8 9 10 11 12 13 14 15 16 17 18 19 20 21	Pocket Pouch 12

IHBS12-6R



Hex Bit Socket Sets

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
IHBS12-6	-	-	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16"	
IHBS12-6R	IR12-LC	5"	3" Hex Bit	5/16" 3/8" 7/16" 1/2"	Driver Roll Pouch 6
IHBS12-8	-	-	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 3/4"	Driver Roll Pouch 6

Hex Bit / Socket Combo Sets

Kit PN#	Ratchet	Ext Bars	Sockets	Socket Sizes	Case
ISHS12-13	-	5"	3" Hex Bit Std Wall	5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16"	Snap Closure Case 601
ISHS-25	IR12-LC	5"	3" Hex Bit	1/4" 5/16" 3/8" 7/16" 1/2" 9/16" 5/8" 3/4"	20" Tool Box
	TW12-DR		Std Wall	3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" 13/16" 7/8" 15/16" 1"	

Socket Sets

RATED 1000 VAC 1500 VDC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts

Socket Rail System

Socket Rail System

The Cementex Socket Rail System System delivers sanity to your tool kits. No more digging through your bag or box to find the right drive, size or style socket, adapter or extension!

Our socket rail system consists of a socket rail paired with socket clips providing the ultimate alternative for socket storage.

- Rails come in two lengths either 9" or 13".
- Clips are sold in 4 packs for 1/4", 3/8" or 1/2" square drive.



The versatility is the beauty of the system, you build your own. The possibilities are endless, well almost, with all the socket styles and options we offer. You can combine any square drive by utilizing the appropriate sized drive clips. Mix and match. All sockets SAE or Metric, all styles (booted, flush connect, standard length or deep wall), extensions or adapters work.

The grooves on each clip will work on either side of socket rail.



CPSRS-RAIL9



CPSRS-RAIL13



PN	DESC
CPSRS-RAIL9.....	Cementex Socket Rail System: 9" Length Rail
CPSRS-RAIL13.....	Cementex Socket Rail System: 13" Length Rail
CPSRS-CLIP14-4.....	Cementex Socket Rail System: 1/4" SqDr Socket Clips (pack of 4)
CPSRS-CLIP38-4...	Cementex Socket Rail System: 3/8" SqDr Socket Clips (pack of 4)
CPSRS-CLIP12-4....	Cementex Socket Rail System: 1/2" SqDr Socket Clips (pack of 4)

RATED
1000 VAC / 1500 DC

Tested to 10,000 VAC and Rated for 1,000 VAC when working on or around live parts